LED T8 Tube Bypass 11.5W 3500/4000/5000K 4FT

SKU: AA-600622UCCT



Description

The new LED Type B bypass T8 is direct replacement for traditional fluorescent T8 tubes, providing instant, flicker-free illumination with lower energy costs.

Applications

Replaces Traditional Fluorescent T8s

- Industrial Spaces
- Commercial Lighting
- Schools
- Retail Stores

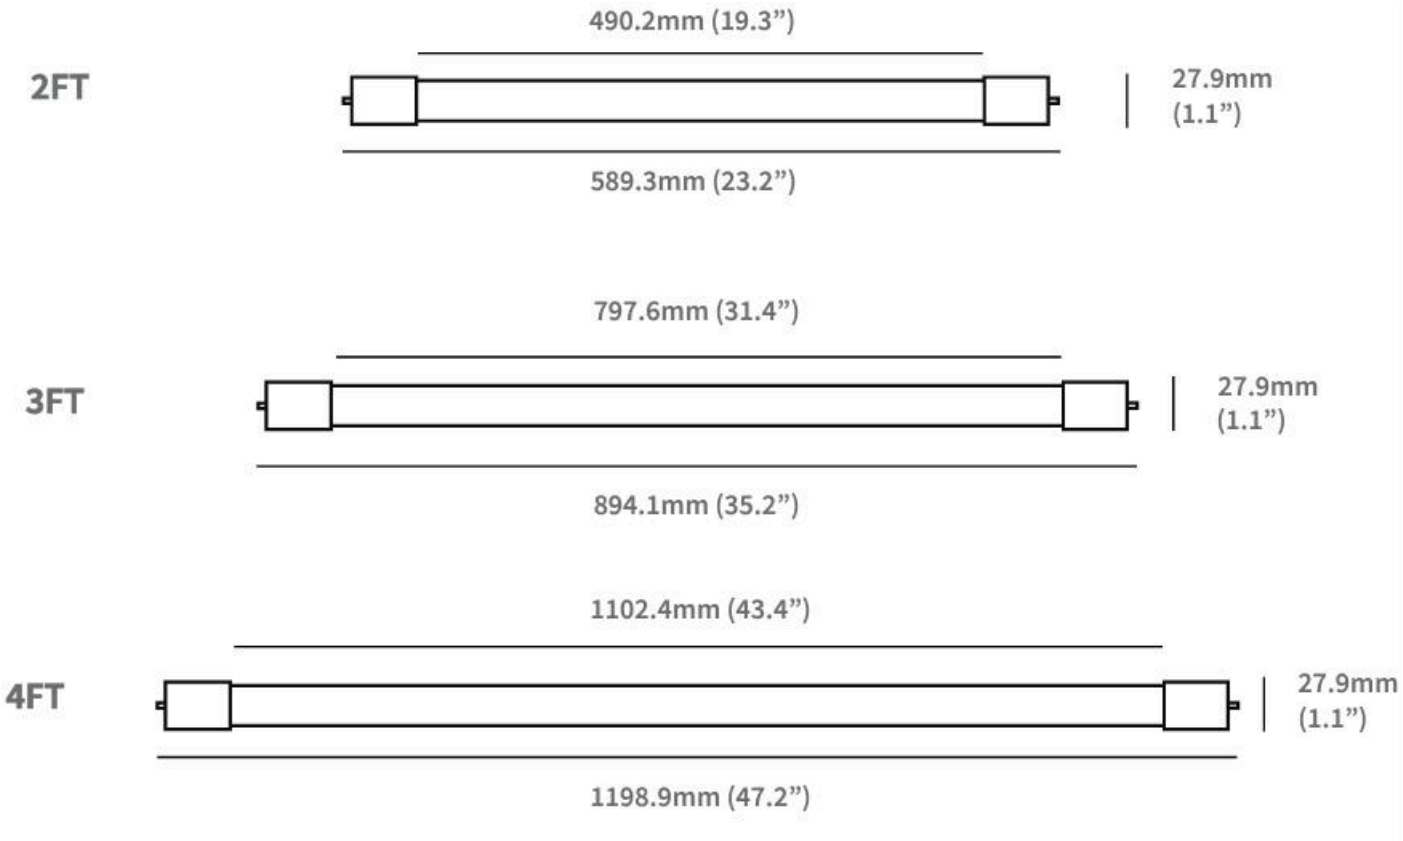
Features

- AC120-347V
- LED T8 Type B Bypass
- Single & Double End Input
- Color Temperature Selectable: 3500/4000/5000K
- Wattage: 11.5W
- CRI: >80
- Triac Dimming @ 120V
- Operating Temperature: -20ºC To 45ºC
- High Lumen Efficiency
- Suitable For Damp Locations
- LM70 180,000hrs, LM80 120,000hrs
- DLC 5.1, UL & CUL Classified
- Efficacy: 152LM/W
- 10 Year Warranty, Extended Warranty Available

Ordering Information

SKU	Model	DLC Product ID	CRI	Voltage	Wattage	Efficacy	Lumens	CCT	Socket	Finish	Size
AA-600054U-TYPEB	CH1192H-46-25W 850-1	S-NP210V	>80	AC120-347V	25W	140LM/W	3400LM	5000K	G5	White	4 FT
AA-600054U-TYPEB-4K	CH1172HT-36-12W 83550-07	CH1172HT	>80	AC120-347V	12W	120LM/W	1500-1600LM	3500/4000/5000K	G13	White	3 FT
AA-600602UCCT	CH1172HT-36-12W 83550-07	S-PB2DHM	>80	AC120-347V	12W	120LM/W	1500-1600LM	3500/4000/5000K	G13	White	3 FT
AA-600618UCCT	CH1172HT-48-15W 83550-07	S-5LSKQG	>80	AC120-347V	15W	140LM/W	2000-2200LM	3500/4000/5000K	G13	White	4 FT
AA-600622UCCT	CH1172HT-48-11.5W 83550-07	S-6ISUMR	>80	AC120-347V	11.5W	152LM/W	1650-1800LM	3500/4000/5000K	G13	White	4 FT
AA-600623UCCT	CH1172HT-24-7W 83550-07	CH1172HT	>80	AC120-347V	11.5W	152LM/W	1100LM	3500/4000/5000K	G13	White	2 FT

Dimensions


2FT
490.2mm (19.3")
27.9mm
(1.1")
589.3mm (23.2")
3FT
797.6mm (31.4")
27.9mm
(1.1")
894.1mm (35.2")
4FT
1102.4mm (43.4")
27.9mm
(1.1")
1198.9mm (47.2")