Instruction Manual

PLEASE READ INSTRUCTION BEFORE COMMENCING INSTALLATION AND RETAIN FOR FUTURE REFERENCES.


! Electrical products can cause death or injury, or damage to property. If in any doubt about the installation or use of this prodcut, consult a competent electrician

Specifications


Model	TLLAU75T4	TLLAU100T4	TLLAU150T4	TLLAU200T4	TLLAU240T4	TLLAU300T4
Power	75W	100W	150W	200W	240W	300W
Net Weight	5.0kg (11.0lbs)	5.1kg (11.2lbs)	5.4kg (11.9lbs)	6.5kg (14.3lbs)	6.7kg(14.8lbs)	10.1kg(22.3lbs)
Input Voltage	AC 100-347V, 50/60Hz					
Operating Temperature	-40°F-113°F (-40°C to 45° C)					
IP Grade	IP 65, suitable for wet location					

Dimensions


Product size (Unit: inch)

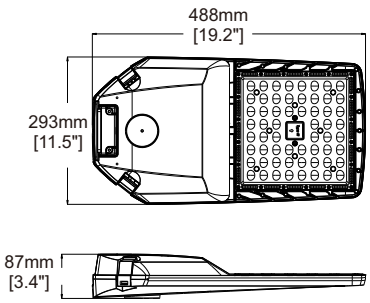

75W/100W/150W

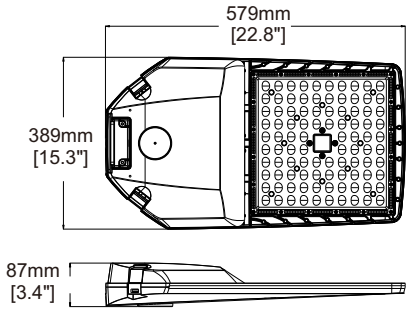

200W/240W

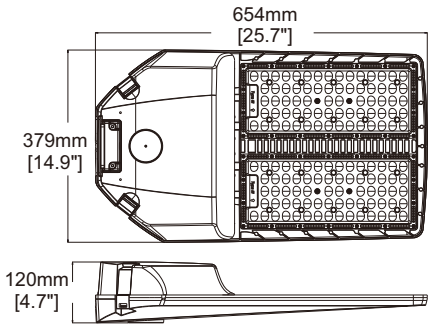

300W

Attention


1. The Installation must be carried out by professional electrician.
2. Ensure mains supply is switched off before commencing work.
3. Mark wall with appropriate fixing positions. Before drilling, ensure that the hole does not impinge on pipe work, cables or other building services.
4. The luminaire is supplied with professional cable. Using suitable IP rated enclosure terminate Brown or Black (Live), Blue or White (Neutral) and Green/ Yellow or Green (Ground) to switch supply.

Note: No "fixings screws or chain provided", please use appropriate fixings screws.

Installation


1. Universal Pole Mount (UPM)


⚠ Caution:
Switch Off the Power Supply

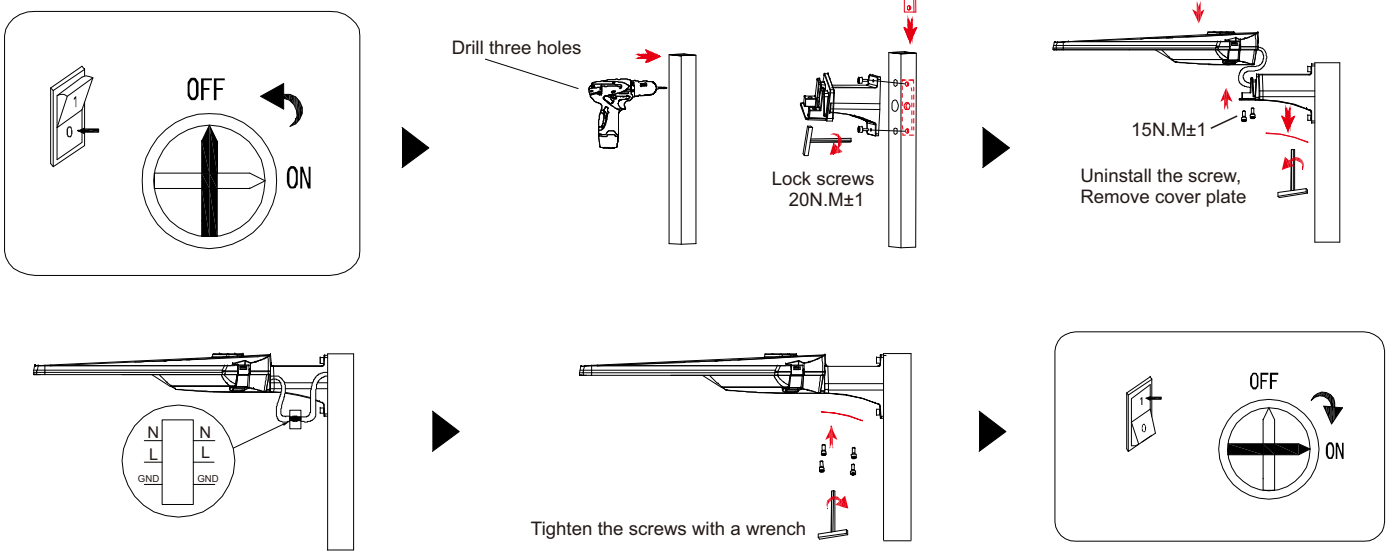

2. Adjustable Pole Mount (APM)


⚠ Caution:
Switch Off the Power Supply

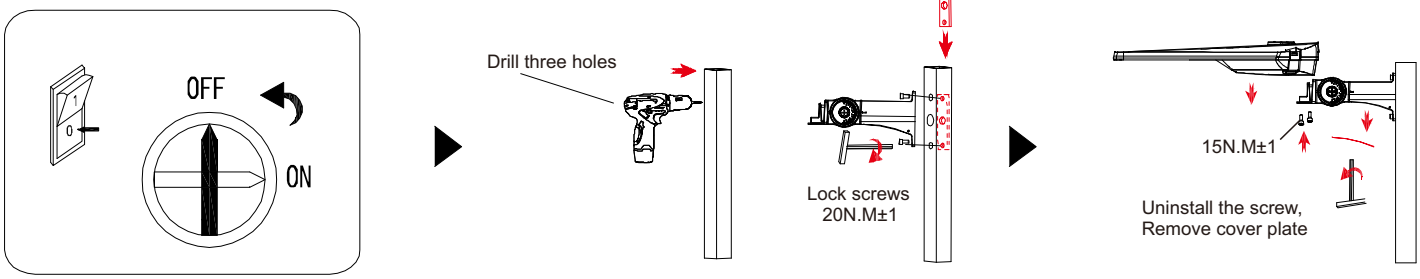


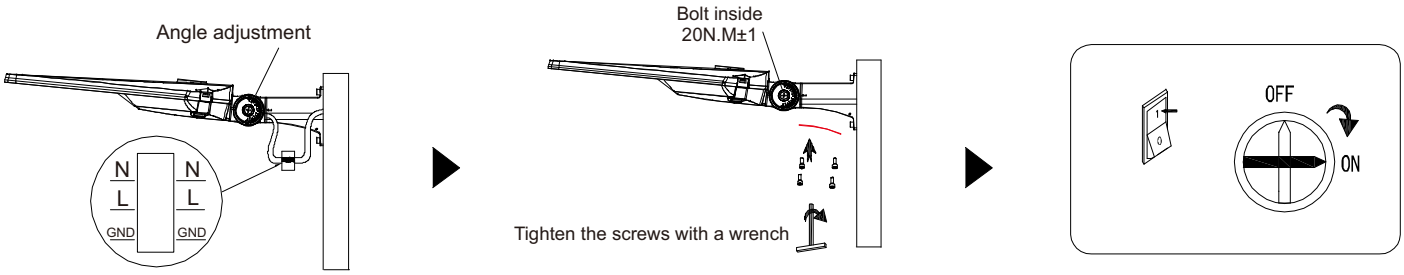

3. Slip Fitter Mount (SFM)

⚠ Caution:
Switch Off the Power Supply

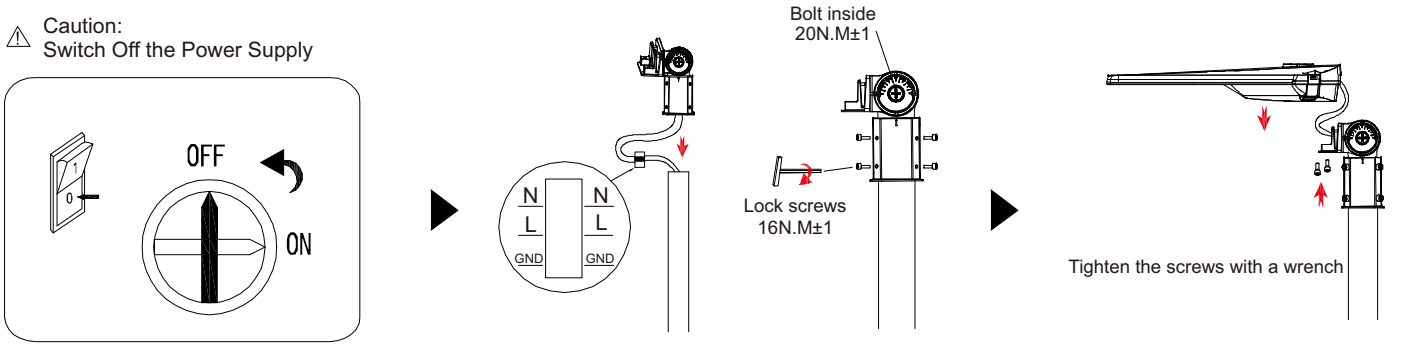

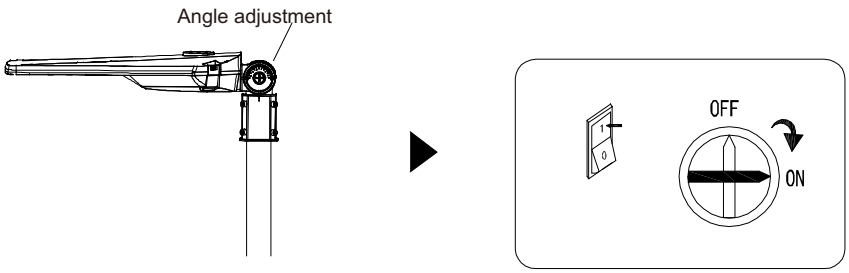

4. Trunnion Mount (TM)

⚠ Caution:
Switch Off the Power Supply

