


TLDEUS25AD

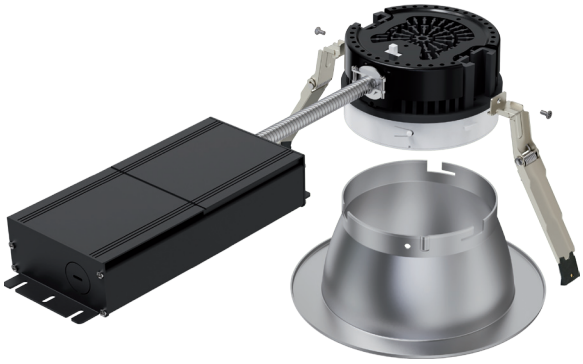



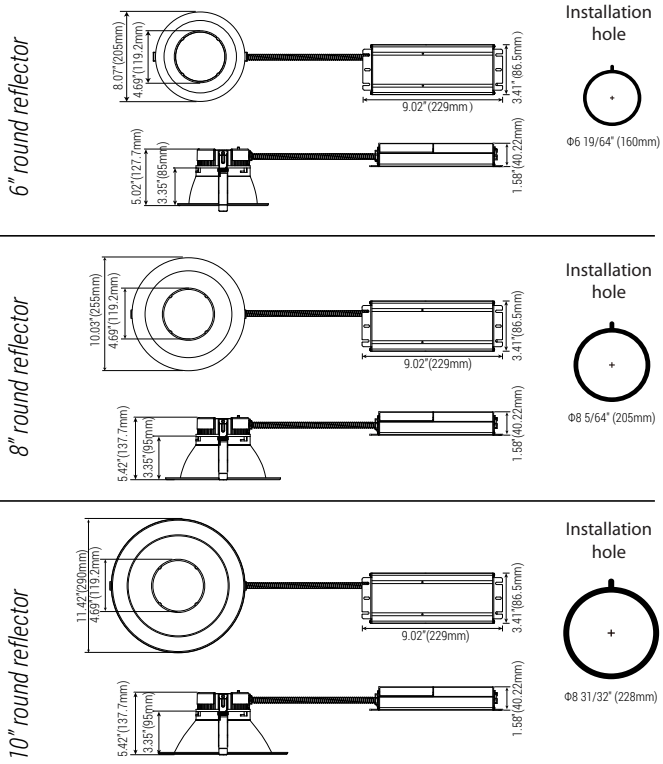

Specifications TLDEUS25AD

Electrical Specifications	
Model no.	TLDEUS25AD
Power (W) ± 10%	15 W / 20 W / 25 W
Input voltage (V)	AC 120-347V, 50/60Hz
Efficacy ± 3%	100 lm/W
Power factor (PF)	>0.9
Dimmable	0-10V

Photometric Specifications		
CRI	90	
CCT	2700K / 3000K / 3500K / 4000K / 5000K	
Beam angle	6": 95° / 8": 70° / 10": 50°	
Light output ± 3%	15W: 1500 lm	20W: 2000 lm
	25W: 2500 lm	

Mechanical Specifications	
IP rating	Wet locations
Material	Aluminum
Lens	Polycarbonate
Net weight	N/A
Product size (mm)	See the drawings
Product size (inch)	See the drawings
Operating humidity	10% - 90%
Operating temperature	-20°C ~ 45°C
Lumen maintenance	78% at 100 000 hours

Product Description:

- Commercial recessed light, IC type.
- Selectable power and CCT.
- Choice of round, semi-specular reflector with white, black or aluminum trim.


Applications:

Shopping centers, residential buildings, hotels, schools, houses, etc.

Optional accessories



Compatible with 6" reflector only



info@technilight.ca

Pictures for illustration purpose only rev 2.6.4