
TLESBU720T2



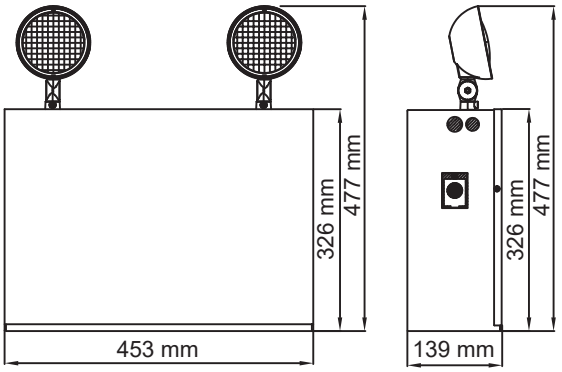

Specifications TLESBU720T2

Electrical Specifications	
Model No.	TLESBU720T2
Consumption (W) ±10%	72 W
Emergency consumption (W) ±10%	10 W (2 x 5 W)
Emergency duration	24 V, 186 W : 120 min 24 V, 245 W : 90 min 24 V, 720 W : 30 min
Input Voltage (V)	AC120 / 347V, 50/60Hz
Efficacy ± 3%	150 lm/W
Power Factor (PF)	0.8
Recharge time	60 hours
Operation mode	Non-maintained

Photometric Specifications	
CRI	85
CCT	6 500 K
Beam angle	40°
Light Output ± 3%	1500 lm

Mechanical Specifications	
IP Rating	Damp locations
Material	Metal + ABS
Lens	PC
Net Weight	N/D
Product size (mm)	± 453 x 477 x 139 mm
Product size (inch)	± 17.8" x 18.8" x 5.5"
Operating Humidity	10% ~ 90%
Operating Temperature	15°C ~ 35°C
Battery	Lead Acid 2 x 12V, 35Ah
Battery warranty	2 years

Product description:

- 720 W battery unit with 2 lighting heads.
- Overload and over-discharge protection.
- Test button and power indicator included.
- Adjustable lighting heads.
- Additional light heads can be connected remotely.

Applications:

Indoor battery unit and emergency lighting.

info@technilight.ca

Pictures for illustration purpose only