
TLFRUS22W40AD IP22



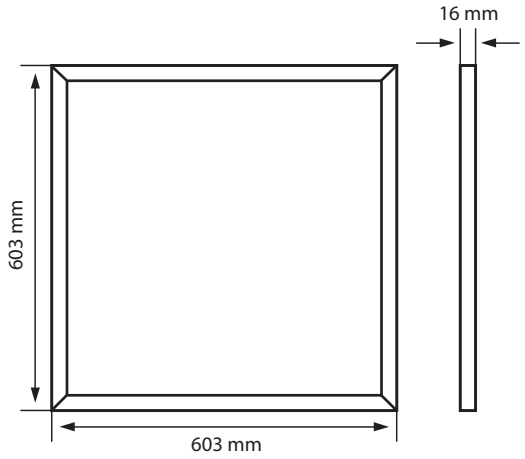

Specifications TLFRUS22W40AD

Electrical Specifications	
Model No.	TLFRUS22W40AD
DLC ID	S-B9D8SV
Power ±10%	20W / 25W / 30W / 35W / 40W
Input Voltage (V)	AC120-347V, 50/60Hz
Efficacy ±3%	125 lm/W
Power Factor (PF)	0.9
Surge protecton	N/A
Total Harmonic Distortion	15%
Dimmable	0-10 V

Photometric Specifications		
CRI	90	
CCT	3000K / 3500K / 4000K / 4500K / 5000K	
Beam angle	120°	
Light Output ±3%	20W: 2500 lm	25W: 3125 lm
	30W: 3750 lm	35W: 4375 lm
	40W: 5000 lm	

Mechanical Specifications	
IP Rating	IP22
Material	Aluminum
Lens	Frosted (polycarbonate)
Net Weight	N/A
Product size (mm)	± 603 x 603 x 16 mm
Product size (in)	± 24" x 24" x 0.63"
Operating humidity	10% ~ 90%
Operating temperature	-20°C ~ 45°C
Lumen maintenance	>79% at 100 000 hours

Product Description:

- LED light frame, for suspended ceiling.
- Selectable CCT and power using a switch.
- Installation: under ceiling tile or suspended.
- 0-10 V variable intensity and compatible with most 0-10 V dimmer models.
- Perfect replacement for the whole set of T8 and T5 fluorescent lighting fixture.
- Uniform brightness, high performance, low energy consumption and low radiant heat.
- Warranty: 5 Years.

Applications:

Offices, business places, clinics, airports, commerces, hotels, basements, etc.



info@technilight.ca