

TLGNFS40ABK IP65



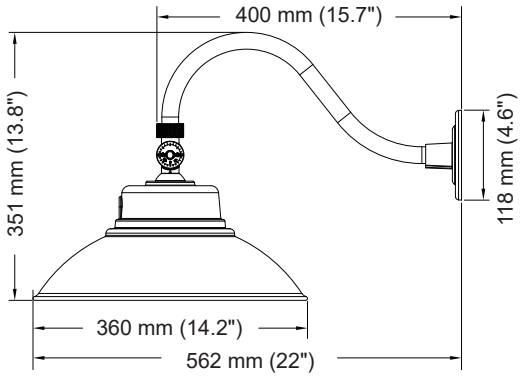



Specifications TLGNFS40ABK

Electrical Specifications	
Model No.	TLGNFS40ABK
DLC ID	N/D
Power (W) ±10%	28W / 35W / 42W
Input Voltage (V)	AC 120 V, 50/60Hz
Efficacy ± 3%	95 lm/W
Power Factor	>0.9
Surge protection	N/D
Total harmonic distortion	<15%
Dimmable	No

Photometric Specifications		
CRI	70	
CCT selectable	3000K / 4000K / 5000K	
Beam angle	100°	
Light output ± 3%	28W: 2660 lm	35W: 3325 lm
	42W: 4000 lm	


Mechanical Specifications	
IP Rating	IP65
Material	Aluminum + PC
Lens	Clear
Net Weight	3.85 kg
Product size (mm)	± 562 x 360 x 351 mm
Product size (inch)	± 22" x 14.2" x 13.8"
Operating humidity	10% ~ 90%
Operating temperature	-40°C ~ 40°C
Lifespan (L70)	50 000 hours

Product description:

- Selectable power and CCT.
- Built-in photocell.
- Wall installation.
- Adjustable installation bracket included.
- Waterproof and dustproof.
- Saves in electricity consumption compared to MH and HPS lighting fixture.
- Warranty: 5 Years.

Applications:

Suitable for gardens, yards, patios, driveways, garages, barns, farms, carports, loading zones, building exteriors, parking lots, streets, storefront lighting stores and many others outdoor spaces.



Hauteur	Lux moy.	Diamètre
1m	1892 lx	289cm
2m	473 lx	578cm
3m	210 lx	867cm
4m	118 lx	1156cm
5m	53 lx	1734cm

info@technilight.ca

Pictures for illustration purpose only