

TLHBLUS2F80A

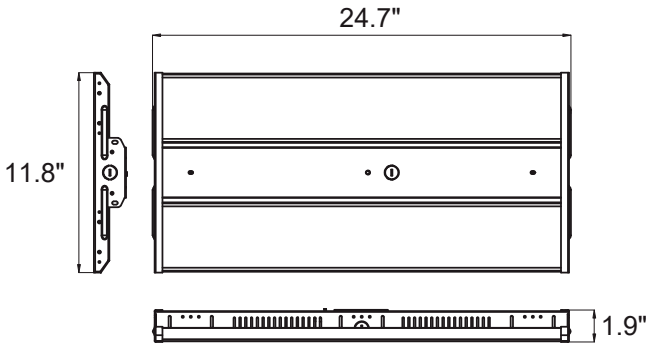

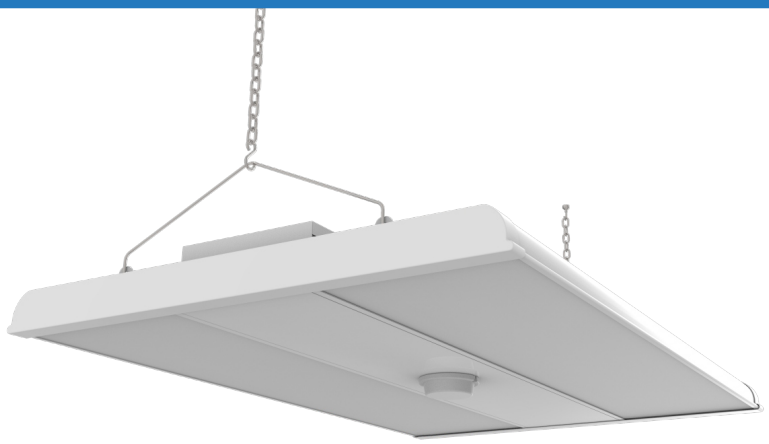

Specifications TLHBLUS2F80A

Electrical Specifications	
Model No.	TLHBLUS2F80A
DLC ID	N/A
Power (W) selectable ± 10%	40W / 60W / 80W
Input Voltage (V)	AC120-347V, 50/60Hz
Efficacy ± 3%	150 lm/W
Power Factor (PF)	0.9
Total harmonic distortion	≤15%
Dimmable	0-10V

Photometric Specifications		
CRI	80	
CCT selectable	3500K / 4000K / 5000K	
Beam angle	120°	
Light Output ± 3%	40W: 6 000 lm	60W: 9 000 lm
	80W: 12 000 lm	

Mechanical Specifications	
IP Rating	IP40
Material	Metal
Lens	Frosted polycarbonate
Net Weight	8.6 kg
Product size (mm)	± 609.6 x 279.4 x 25.4 mm
Product size (inch)	± 24.7" x 11.8" x 1.9"
Operating Humidity	10% - 90%
Operating Temperature	-20°C ~ 50°C
Lumen maintenance	>80% at 100 000 hours

Product Description:

- LED luminaire for high ceiling.
- This lighting system is ideal for replacing conventional HID or fluorescent high bay systems.
- Built in motion sensor base.
- Saves up to 60% in electricity consumption compared to fluorescent lighting fixture.
- 4 feet suspension kit included.
- Warranty: 5 Years.
- Color: white.

Applications:

Warehouse, workshop, factory, garage, gymnasium, exhibition areas and others.

Accessories (not included)

 HD07VR-MH-WH	Microwaves motion sensor (Up to 24')	 HD07VR-PH-WH	PIR motion sensor (Up to 24')	 HD09VR-PHC-WH	PIR motion sensor (Up to 50')
 HD06R	Remote control setting for motion sensor (optional)	 TLHBLUSPM	Bracket for pendant or surface mounting	 TLHBL2WG	Protective grid (2 pieces)
 BLD-GM30R	Emergency battery				

info@technilight.ca

Pictures for illustration purpose only