

TLHBUS240A120

Indoor high bay luminaire



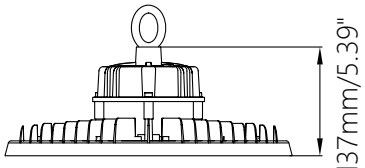

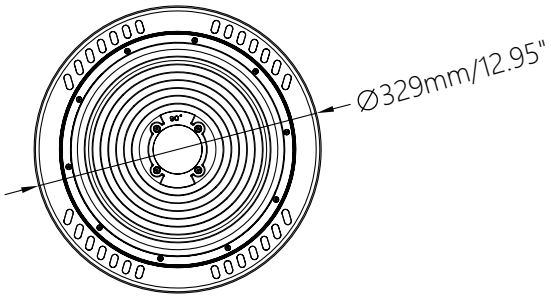

Electrical specifications	
Model no.	TLHBUS240A120
DLC ID	-
Power ±10%	150W / 200W / 240W
Input voltage	120-347 V
Frequency	50/60 Hz
Efficacy ±3%	150 lm/W
Power factor	>0.95
Dimmable	0-10 V
Surge protection	6 kv
Total harmonic distortion	120VAC: <6% | 347VAC: <12%

Photometric specifications	
CRI	>80
CCT	3000K / 4000K / 5000K
Beam angle	120°
Light output ±3%	36 000 lm

Mechanical specifications	
IP rating	IP65 / IK08
Material	Aluminum
Lens	Clear polycarbonate
Net weight	2.1 kg
Product dimensions	± Ø12.95" x 5.39"
	± Ø329 mm x 137 mm
Operating humidity	5% ~ 95%
Operating temperature	-40°C ~ 45°C
Lumen maintenance	-

Product description:

- Selectable power and color temperature. • Die-cast aluminum material and finned design for faster heat dissipation.
- Significant energy savings compared to conventional lighting with similar light output.
- 2' stainless steel pendant kit included.
- 6' power cord.

Applications:

Warehouse, workshop, garage, industry, arena and other high ceiling areas.

Optional accessory



BLD-RM60R

Emergency lighting battery for high bay luminaires ≤300W