
# TLLE4F60H120P IP66 / IP67

## Explosion proof



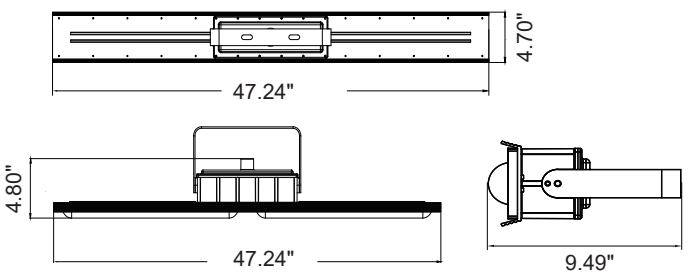


## Specifications TLLE4F60H120P

| Electrical specifications | |
|---|---|
| Model No. | TLLE4F60H120P |
| Power (W) ± 10% | 60 W |
| Input Voltage (V) | AC200-480V, 50/60Hz |
| Efficacy ± 3% | 140 lm/W |
| Power Factor (PF) | 0.9 |
| Total harmonic distortion | <15% |
| Surge protection | 10 kv |

| Photometric specifications | |
|---|---|
| CRI | ≥70 |
| CCT | 5 000 K |
| Beam angle | 120° |
| Light Output ± 3% | 8 400 lm |
| Dimmable | 0-10 V |

| Mechanical specifications | |
|---|---|
| IP Rating | IP66 / IP67 |
| Material | Aluminum + PC |
| Lens | Clear |
| Net Weight | 5.44 kg |
| Product size (mm) | ± 1 193.8 x 101.5 x 101.6 mm |
| Product size (inch) | ± 47.24" x 4.70" x 4.80" |
| Operating Humidity | 10% ~ 95% |
| Operating Temperature and Temperature Class | -40°C ~ 60°C, T4 |
| Lumen maintenance | >75% at 100 000 hours |

## Product description:

- UL-844 Dangerous places
  CAN / CSA-C22.2 NO. 137
  CLASS 1 DIV 2 GROUP A, B, C, D
  CLASS 2 DIV 1 GROUP E, F, G
  CLASS 2 DIV 2 GROUP F, G
  CLASS 3
- Savings on energy consumption compared to HPS / MH lighting.
- Warranty: 5 years.
- Other CCT available on request.
- Color: Gray.

## Applications:

Areas with risk of explosion (gas emissions), areas with vapor or dust, petrochemical complexes, mines, etc.
Designed for wet locations.
Indoor and outdoor.

info@technilight.ca



Pictures for illustration purpose only 