
TLT8US4F22A

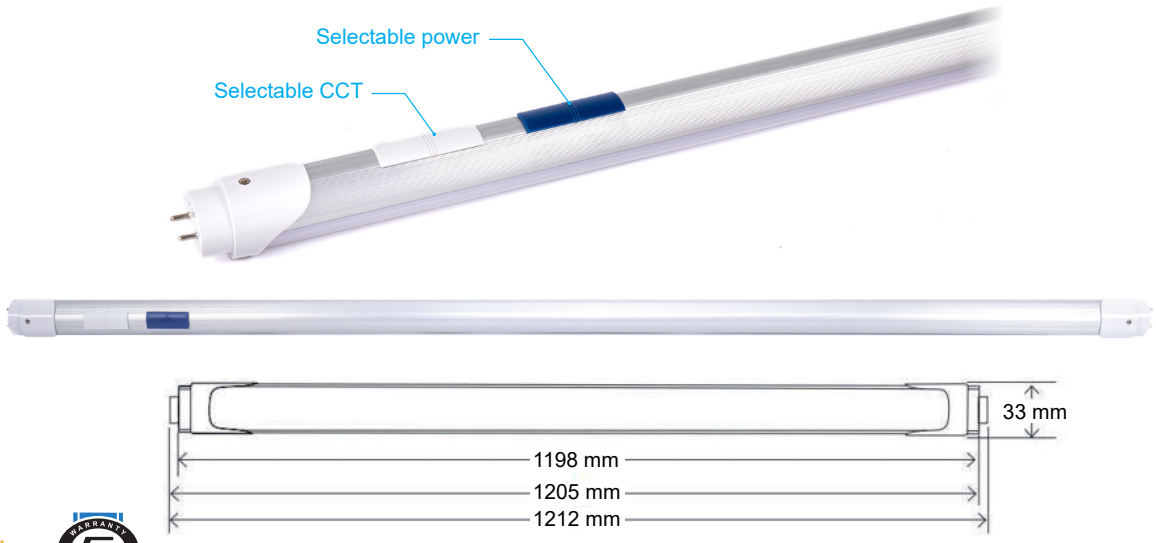


Specifications TLT8US4F22A

Electrical Specifications	
Model No.	TLT8US4F22A
DLC ID	S-MX25HN
Power (W) selectable ±10%	10 / 12 / 15 / 18 / 20 / 22
Input Voltage(V)	AC100-347V, 50/60Hz
Efficacy ±3%	130 lm/W
Power Factor (PF)	0.9

Photometric Specifications	
CRI	83
CCT	Selectable
Beam angle	180°
Light Output ±10%	Min: 1 300 lm Max: 2 860 lm
Dimmable	No

Mechanical Specifications	
Material	Aluminum + PC
Lens	Frosted
Product size (mm)	± 1 212 x 33 mm
Product size (in)	± 47.72 x 1.3"
Operating Humidity	10% - 90%
Operating Temperature	-20°C ~ 40°C

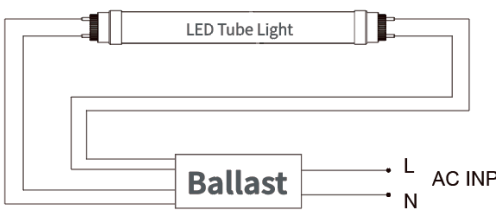


Product description:

- Selectable CCT: 3 000 K / 3 500 K / 4 000 K / 5 000 K / 6 000 K / 6 500 K.
- Aluminum and polycarbonate construction.
- Perfect replacement for the whole set of T8 and T12 fluorescent lighting fixture.
- Soft and uniform light. No glare and no flickering.
- Economy on electricity consumption compared to fluorescent lighting fixture.
- "UL Type A and B". With ballast and direct supply from 100 to 347 VAC.
- Warranty: 5 Years.

Applications:

Fluorescent T8 and T12 tubes replacement.
Compatible with TLYH8G luminaire.

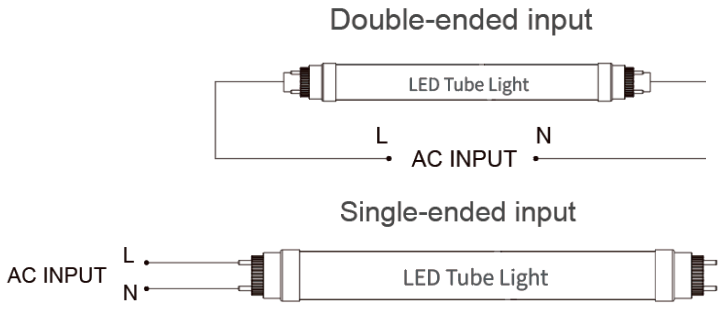

info@technilight.ca

Pictures for illustration purpose only rev 2.5.3