
# TLTFUS24W50AD IP20



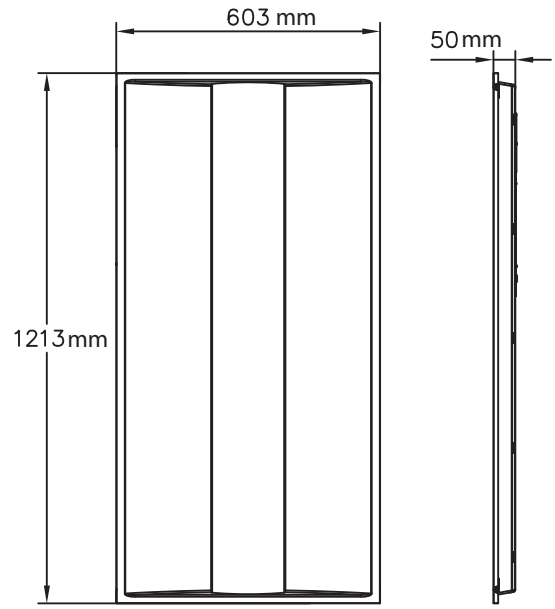


## Specifications TLTFUS24W50AD

| Electrical specifications | |
|---|---|
| Model No. | TLTFUS24W50AD |
| DLC ID | S-W7U69D |
| Adjustable power (W) ± 10% | 30W / 40W / 50W |
| Input Voltage (V) | AC 120/347V, 50/60Hz |
| Efficacy ± 3% | 126.26 lm/W |
| Power Factor (PF) | 0.952 |
| Surge protection | N/A |
| Total harmonic distortion | 12.6 % |

| Photometric specifications | | |
|---|---|---|
| CRI | 82 | |
| Selectable CCT | 3500K / 4000K / 5000K | |
| Beam angle | 120° | |
| Light Output ± 3% | 30W: 3788 lm | 40W: 5050 lm |
| | 50W: 6313 lm | |
| Dimmable | 0-10V | |

| Mechanical specifications | |
|---|---|
| IP Rating | IP20 / Damp locations |
| Material | SPCC + PC |
| Lens | Frosted |
| Net Weight | 7 kg |
| Product size (mm) | ± 1213 x 603 x 50 mm |
| Product size (inch) | ± 48 x 24 x 2 in |
| Operating Humidity | 10% - 90% |
| Operating Temperature | -40°C ~ 50°C |
| Lifespan (L70) | 54 000 hours |

## Product description:

- Large supply voltage range 120-347V.
- Selectable power and CCT.
- Versatile design makes installation easy which reduces installation time and costs.
- Saves on electricity consumption compared to fluorescent lighting fixture.
- Warranty: 5 years.
- High efficiency reflective PC cover, soft and bright lighting.

## Applications:

Suitable for offices, conference rooms, shops, supermarkets, etc.

### Optional accessories

|  |  |  |
|---|---|---|
| Surface insallation frame 2' x 4' white | Recessed mounting frame 2' x 4' white | Emergency battery |
| TLPBL24WMF | TLPL24RMFWH | BLD-HM15D |

info@technilight.ca



Pictures for illustration purpose only