
TLTL20D36ABK

Track light



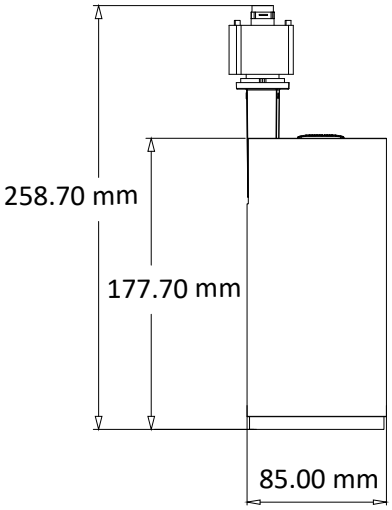

Accessories (not included)

 TLTL15/20/25L24	24° lens for track light	 TLTL15/20/25L60	60° lens for track light	 PRO-0302A-B	3 wires single phase, 2 ft HALO track
 PRO-0304A-B	3 wires single phase, 4 ft HALO track	 PRO-0306A-B	3 wires single phase, 6 ft HALO track	 PRO-0308A-B	3 wires single phase, 8 ft HALO track
 PRO-0331-B	Live end connector for 3 wires HALO track	 PRO-0333-B	Joint for 3 wires HALO track	 PRO-0334-B	Straight connector for 3 wires HALO track
 PRO-0335-B	L connector for 3 wires HALO track	 PRO-0336-B	T connector for 3 wires HALO track	 PRO-0337-B	X connector for 3 wires HALO track
 PRO-0341-B	Junction box connector for 3 wires HALO track	 PRO-0342-B	4" cover, use with PRO-0331-B		

Specifications TLTL20D36ABK

Electrical Specifications	
Model No.	TLTL20D36ABK
DLC ID	N/D
Power (W) ±10%	20W
Input Voltage (V)	AC 120V, 50/60Hz
Efficacy ± 3%	100 lm/W
Power Factor (PF)	0.9
Surge ptotection	N/D
Total harmonic distortion	<20%
Dimmable	Triac

Photometric Specifications	
CRI	>90
CCT selectable	27K / 30K / 35K / 40K / 50K
Beam angle	36°
Light Output ± 3%	2 000 lm

Mechanical Specifications	
IP Rating	N/D
Matérial	Aluminum + PMMA
Lens	Clear
Net Weight	0.8 kg
Product size (mm)	± Ø85 x 258.7 mm
Product size (inch)	± Ø3.4" x 10.2"
Operating Humidity	10% to 90%
Operating Temperature	-20°C to 45°C
Lumen maintenance	>83% at 100 000 hours

Product description:

- Selectable CCT: 2700K / 3000K / 3500K / 4000K / 5000K.
- Adjustable 350° horizontal and 90° vertical rotation.
- Interchangeable projection angle: 24° / 36° / 60°.
- Energy savings compared with conventional lighting.
- Warranty: 5 years.
- Compatible with HALO 3 single-circuit rail system connections.
- Color: black.

Applications:


Suitable for offices, sales areas, residential lighting, art galleries, museums, halls, etc.

info@technilight.ca

Pictures for illustration purpose only

Light distribution


Flux out: 957.1 lm

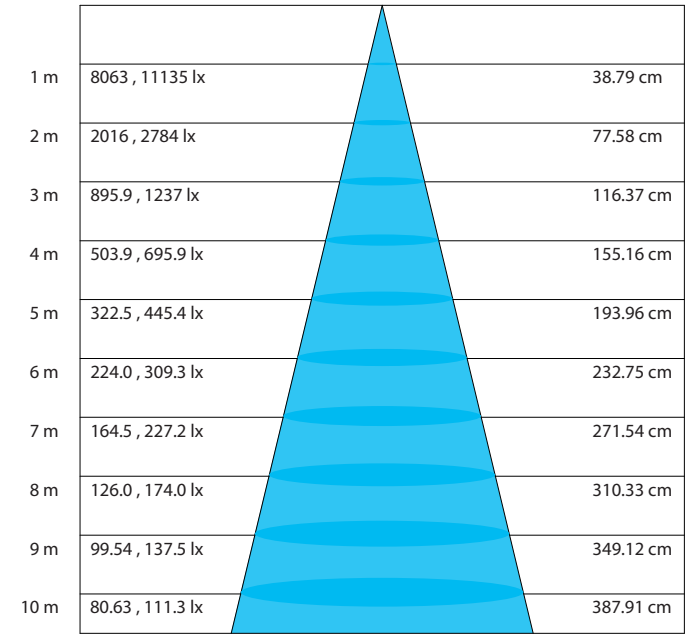

Height	Ave, Max	Diameter
1 m	8063 , 11135 lx	38.79 cm
2 m	2016 , 2784 lx	77.58 cm
3 m	895.9 , 1237 lx	116.37 cm
4 m	503.9 , 695.9 lx	155.16 cm
5 m	322.5 , 445.4 lx	193.96 cm
6 m	224.0 , 309.3 lx	232.75 cm
7 m	164.5 , 227.2 lx	271.54 cm
8 m	126.0 , 174.0 lx	310.33 cm
9 m	99.54 , 137.5 lx	349.12 cm
10 m	80.63 , 111.3 lx	387.91 cm

24°


Flux out: 1 450 lm

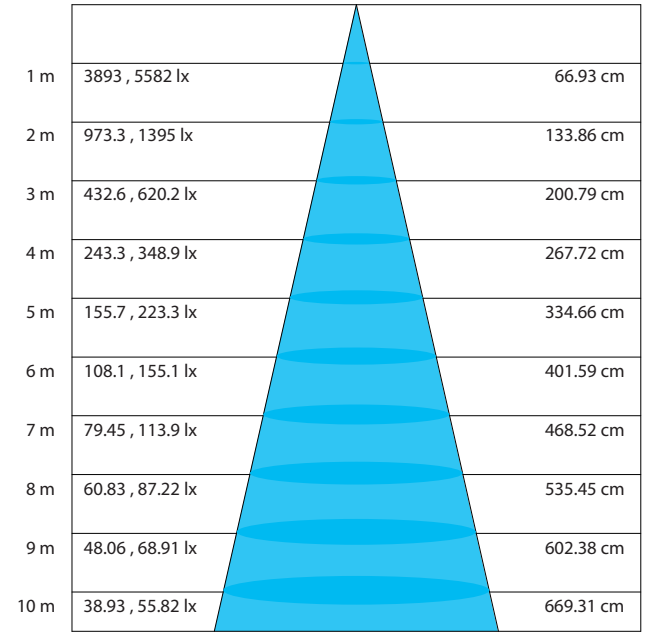

Height	Ave, Max	Diameter
1 m	3893 , 5582 lx	66.93 cm
2 m	973.3 , 1395 lx	133.86 cm
3 m	432.6 , 620.2 lx	200.79 cm
4 m	243.3 , 348.9 lx	267.72 cm
5 m	155.7 , 223.3 lx	334.66 cm
6 m	108.1 , 155.1 lx	401.59 cm
7 m	79.45 , 113.9 lx	468.52 cm
8 m	60.83 , 87.22 lx	535.45 cm
9 m	48.06 , 68.91 lx	602.38 cm
10 m	38.93 , 55.82 lx	669.31 cm

36°

Flux out: 1 324 lm

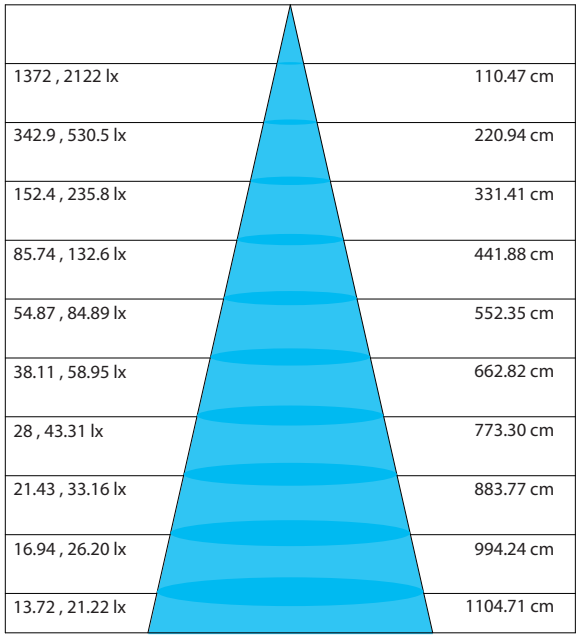

Height	Ave, Max	Diameter
1 m	1372 , 2122 lx	110.47 cm
2 m	342.9 , 530.5 lx	220.94 cm
3 m	152.4 , 235.8 lx	331.41 cm
4 m	85.74 , 132.6 lx	441.88 cm
5 m	54.87 , 84.89 lx	552.35 cm
6 m	38.11 , 58.95 lx	662.82 cm
7 m	28 , 43.31 lx	773.30 cm
8 m	21.43 , 33.16 lx	883.77 cm
9 m	16.94 , 26.20 lx	994.24 cm
10 m	13.72 , 21.22 lx	1104.71 cm

60°