
Technilight

TLVPER4F60HP IP66

Explosion proof



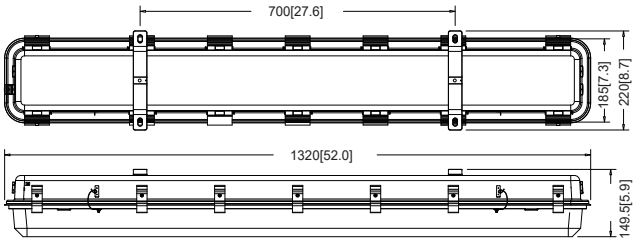

Specifications TLVPER4F60HP

Electrical specifications	
Model No.	TLVPER4F60HP
Power (W) ± 10%	60 W
Input Voltage (V)	AC200-480V, 50/60Hz
Efficacy ± 3%	140 lm/W
Power Factor (PF)	0.9
Total harmonic distortion	<15%
Surge protection	10 Kv

Photometric specifications	
CRI	>80
CCT	5 000 K
Beam angle	120°
Light Output ± 3%	8 400 lm
Dimmable	0-10 V


Mechanical specifications	
IP Rating	IP66
Material	Aluminum + PC
Lens	Frosted
Net Weight	8 kg
Product size (mm)	± 1 320 x 185 x 149.5 mm
Product size (inch)	± 52" x 7.3" x 5.9"
Operating Humidity	10% ~ 95%
Operating Temperature and Temperature Class	-40°C ~ 50°C, T5/T6
Lumen maintenance	N/A

Product description:

- UL844: Dangerous places
  CAN / CSA-C22.2 NO. 137
  CLASS 1 - DIVISION 2 - GROUP A, B, C, D
  CLASS 2 - DIVISION 1 - GROUP E, F, G
  CLASS 2 - DIVISION 2 - GROUP F, G
  CLASS 3
- Savings on energy consumption compared to HPS / MH lighting.
- Warranty: 5 years.
- Other CCT available on request.
- Color: Gray.

Applications:

Areas with risk of explosion (gas emissions), areas with vapor or dust, petrochemical complexes, mines, etc.
Designed for wet locations.
Indoor and outdoor.

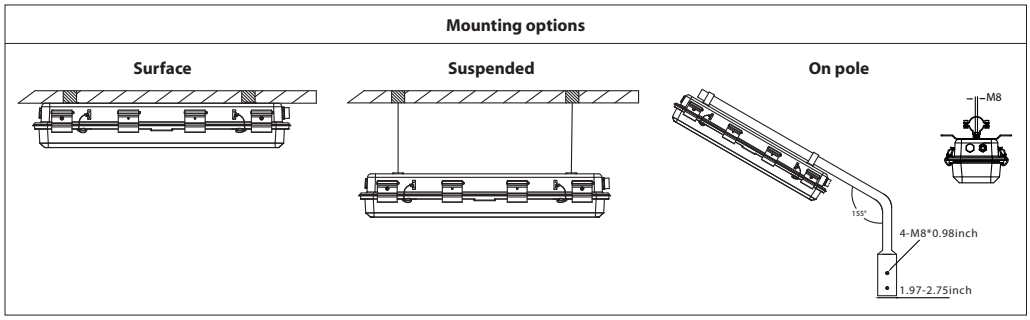

info@technilight.ca

Pictures for illustration purpose only