
TLWMAUS80ASL IP65



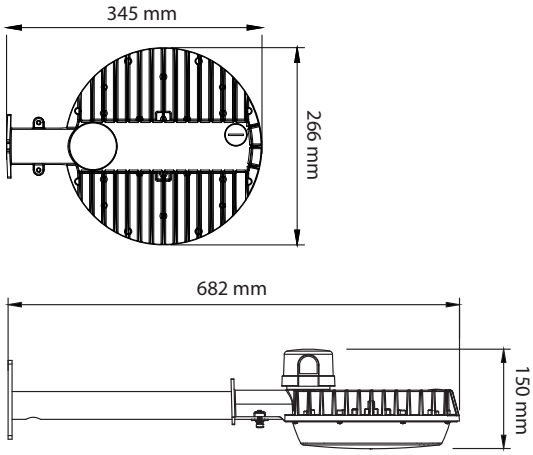

Specifications TLWMAUS80ASL

Electrical Specifications	
Model No.	TLWMAUS80ASL
DLC ID	N/D
Power(W) selectable ±10%	40W / 60W / 80W
Input Voltage (V)	AC 120-347V, 50/60Hz
Efficacy ± 3%	130 lm/W
Power Factor (PF)	0.9
Surge protection	4 Kv
Total harmonic distortion	<20%
Dimmable	0-10V

Photometric Specifications		
CRI	≥80	
CCT selectable	3000K / 4000K / 5000K	
Beam angle	120°	
Light Output ± 3%	40W: 5200 lm	60W: 7800 lm
	80W: 10400 lm	

Mechanical Specifications	
IP Rating	IP65
Material	Aluminum + PC
Lens	Frosted
Net Weight	1.74 kg
Product size (mm)	± 345 x 266 x 103 mm
Product size (inch)	± 13.6" x 10.5" x 4.05"
Operating Humidity	10% à 90%
Operating Temperature	-30°C à 45°C
Lifespan (L70)	50 000 hours

Product Description:

- Selectable power and CCT.
- Replace 250 W MH or HPS lighting.
- Mounts on wall or pole, accessories included.
- A dusk-to-dawn photocell provides automatic on/off. Photocell included.
- Bracket included.
- Waterproof and dustproof.
- Saves in electricity consumption compared to MH and HPS lighting fixture.
- Warranty: 5 Years.

Applications:

Dusk-to-dawn light.
Provides general purpose area, security, roadway and landscape lighting.
Used for outdoor lighting: factories, warehouses, farms, etc.

info@technilight.ca

Pictures for illustration purpose only