

TLWMAUS90ASL IP65





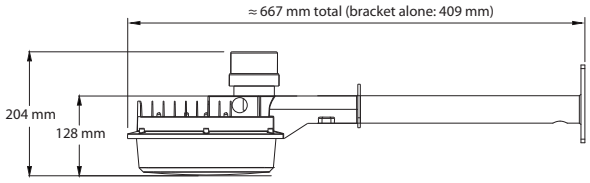

Specifications TLWMAUS90ASL

Electrical Specifications	
Model No.	TLWMAUS90ASL
DLC ID	N/D
Power (W) selectable ±10%	50W / 70W / 90W
Input Voltage (V)	AC 120-347V, 50/60Hz
Efficacy ± 3%	140 / 135 / 130 lm/W
Power Factor (PF)	≥0.95
Surge protection	2 kv
Total harmonic distortion	<20%
Dimmable	No

Photometric Specifications		
CRI	≥70	
CCT selectable	2200K / 4000K / 5700K	
Beam angle	120°	
Light Output ± 3%	50W: 7000 lm	70W: 9450 lm
	90W: 11700 lm	

Mechanical Specifications	
IP Rating	Wet locations
Material	Aluminum + PC
Lens	Frosted
Net Weight	1.5 kg
Product size (mm)	± 374 x 253 x 128 mm
Product size (inch)	± 14.7" x 10" x 5.04"
Operating Humidity	10% ~ 90%
Operating Temperature	-40°C ~ 50°C
Lumen maintenance	N/A

Product Description:

- Selectable power and CCT.
- Mounts on wall or pole, accessories included.
- A dusk-to-dawn photocell provides automatic on/off. Photocell included.
- Bracket included.
- Waterproof and dustproof.
- Saves in electricity consumption compared to MH and HPS lighting fixture.
- Warranty: 5 Years.

Applications:

Dusk-to-dawn light.
Provides general purpose area, security, roadway and landscape lighting.
Used for outdoor lighting: factories, warehouses, farms, etc.

info@technilight.ca

Pictures for illustration purpose only