


TLWMBUS60ABK IP65

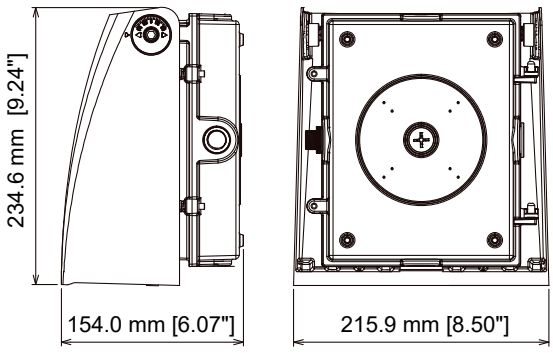

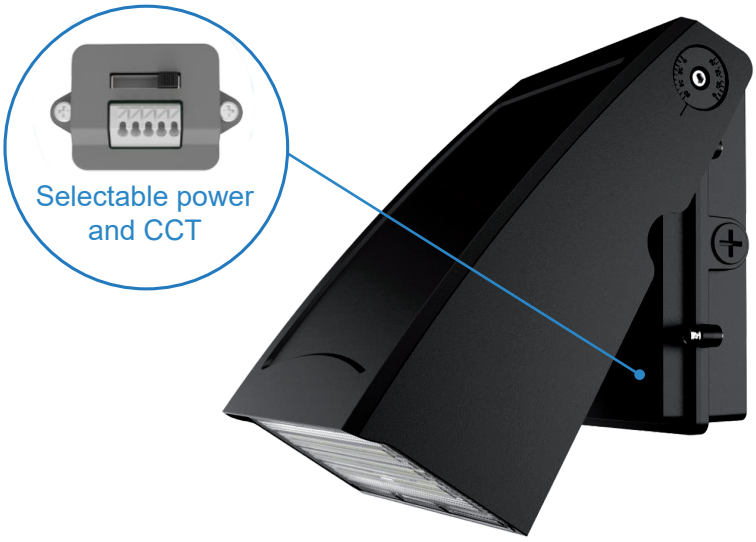

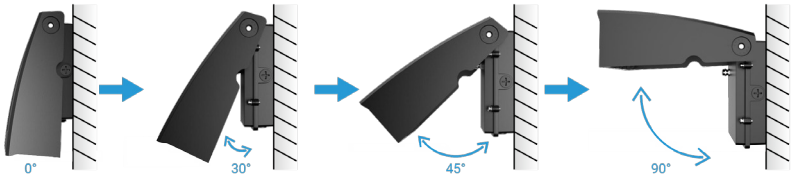

Adjustable direction

Specifications TLWMBUS60ABK

Electrical Specifications	
Model No.	TLWMBUS60ABK
DLC ID	S-WN04M7
Power (W) selectable ±10%	30W / 40W / 50W / 60W
Input Voltage (V)	AC 120-347V, 50/60Hz
Efficacy ± 3%	150 lm/W
Power Factor (PF)	0.946
Surge protection	N/A
Total harmonic distortion	<15%
Dimmable	0-10V

Photometric Specifications		
CRI	74	
CCT selectable	3000K / 4000K / 5000K	
Beam angle	Type II	
Light Output ± 3%	30W: 4 500 lm	40W: 6 000 lm
	50W: 7 500 lm	60W: 9 000 lm

Mechanical Specifications	
IP Rating	IP65
Material	Aluminum
Lens	Polycarbonate
Net Weight	N/A
Product size (mm)	± 216 x 234.6 x 154 mm
Product size (inch)	± 8.5" x 9.24" x 6.07"
Operating Humidity	10% - 90%
Operating Temperature	-30°C ~ 45°C
Lumen maintenance	>75% at 100 000 hours

Product Description:

- Large supply voltage range 120-347V.
- Selectable power and CCT.
- Built-in photocell.
- Adjustable direction from 0 to 90 degrees.
- Die cast aluminum housing provides solid mounting to wall.
- Saves on electricity consumption compared to conventional lighting fixture.
- Color: black.
- Warranty: 5 Years.

Applications:

Perimeter lighting for safety and security. Use on factories, warehouses, commercial buildings, etc.

info@technilight.ca

Pictures for illustration purpose only rev 2.4.8