

TLWMFUS40ABK IP65



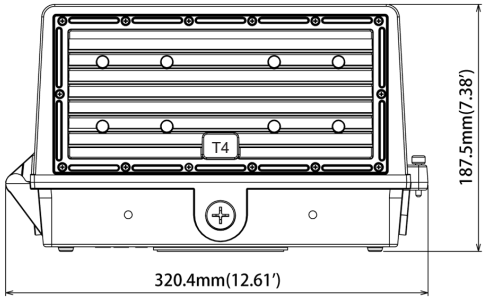



Specifications TLWMFUS40ABK

Electrical Specifications	
Model No.	TLWMFUS40ABK
DLC ID	PLI72SZYZYF6
Power (W) selectable ± 10%	15W / 20W / 30W / 40W
Input Voltage (V)	AC 120-347V, 50/60Hz
Efficacy ± 3%	134.19 lm/W
Power Factor (PF)	0.9085
Surge ptotection	L-N: 2 KV L/N-PE: 4 KV
Total harmonic distortion	<15%
Dimmable	0-10V

Photometric Specifications		
CRI	71.3	
CCT selectable	3000K / 4000K / 5000K	
Beam angle	Type IV	
Light Output ± 3%	15W: 2012.85 lm	20W: 2683.8 lm
	30W: 4025.7 lm	40W: 5367.6 lm

Mechanical Specifications	
IP Rating	IP65
Material	Aluminum
Lens	PC
Net Weight	2.40 kg
Product size (mm)	± 320.4 x 187.5 x 130.2 mm
Product size (inch)	± 12.61" x 7.38" x 5.13"
Operating Humidity	10% - 90%
Operating Temperature	-35°C ~ 45°C
Lifespan (L70)	54 000 hours

Product Description:

- Large supply voltage range 120-347V.
- Selectable power and CCT.
- Lens type II, type III and type IV available.
- Die cast aluminum housing provides solid mounting to wall.
- Built-in photocell .
- Saves on electricity consumption compared to conventional lighting fixture.
- Color: black.
- Warranty: 5 Years.

Applications:

Perimeter lighting for safety and security. Use on factories, warehouses, commercial buildings, etc.

info@technilight.ca

Pictures for illustration purpose only