
TLWMUS120ABK IP65





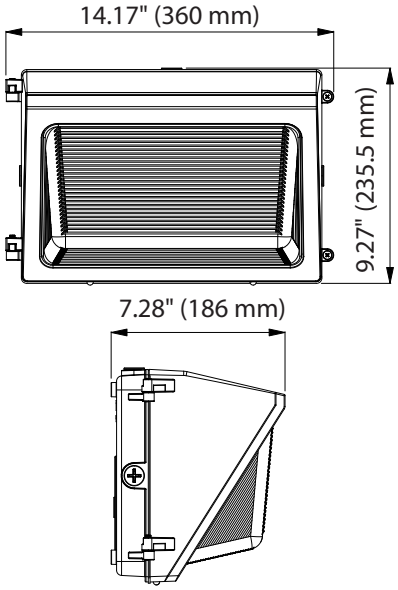

Specifications TLWMUS120ABK

Electrical Specifications	
Model No.	TLWMUS120ABK
DLC ID	S-0LS35Y
Power (W) selectable ±10%	80W / 90W / 100W / 120W
Input Voltage (V)	AC 120-347V, 50/60Hz
Efficacy ± 3%	144.56 lm/W
Power Factor (PF)	0.953
Total harmonic distortion	<15%
Dimmable	0-10 V

Photometric Specifications		
CRI	82	
CCT selectable	3000K / 4000K / 5000K	
Beam angle	120°	
Light Output ± 3%	80W: 11 564.8 lm	90W: 13 010.4 lm
	100W: 14 456 lm	120W: 17 347.2 lm

Mechanical Specifications	
IP Rating	IP65
Material	Aluminum
Lens	Glass
Net Weight	3.9 kg
Product size (mm)	± 360 x 235.5 x 186 mm
Product size (inch)	± 14.17" x 9.27" x 7.28"
Operating Humidity	10% - 90%
Operating Temperature	-30°C ~ 45°C
Lumen maintenance	>78% at 100 000 hours

Product Description:

- Large supply voltage range 120-347V.
- Selectable power and CCT.
- Die cast aluminum housing provides solid mounting to wall.
- Built-in photocell.
- Saves on electricity consumption compared to conventional lighting fixture.
- Color: black.
- Warranty: 5 Years.
- It could be fit with sensor.

Applications:

Perimeter lighting for safety and security. Use on factories, warehouses, commercial buildings, etc.

info@technilight.ca

Pictures for illustration purpose only