
TLWMUS60ABK IP65



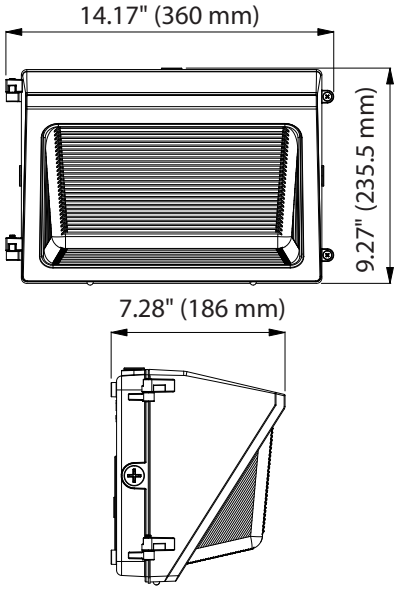

Specifications TLWMUS60ABK

Electrical Specifications	
Model No.	TLWMUS60ABK
DLC ID	S-7GNTFS
Power (W) selectable ±10%	30W / 40W / 50W / 60W
Input Voltage (V)	AC 120-347V, 50/60Hz
Efficacy ± 3%	147.06 lm/W
Power Factor (PF)	0.954
Total harmonic distortion	≤15%
Dimmable	0-10 V

Photometric Specifications		
CRI	82	
CCT selectable	3000K / 4000K / 5000K	
Beam angle	120°	
Light Output ± 3%	30W: 4 411.8 lm	40W: 5 882.4 lm
	50W: 7 353 lm	60W: 8 823.6 lm

Mechanical Specifications	
IP Rating	IP65
Material	Aluminum
Lens	Glass
Net Weight	3.9 kg
Product size (mm)	± 360 x 235.5 x 186 mm
Product size (inch)	± 14.17" x 9.27" x 7.28"
Operating Humidity	10% - 90%
Operating Temperature	-30°C ~ 45°C
Lumen maintenance	>79% at 100 000 hours

Product Description:

- Large supply voltage range 120-347V.
- Selectable power and CCT.
- Die cast aluminum housing provides solid mounting to wall.
- Built-in photocell.
- Saves on electricity consumption compared to conventional lighting fixture.
- Color: black.
- Warranty: 5 Years.
- It could be fit with sensor.

Applications:

Perimeter lighting for safety and security. Use on factories, warehouses, commercial buildings, etc.

info@technilight.ca

Pictures for illustration purpose only rev 2.4.9