Project: _____ Distr./entr.: _____

Type: _____ PO: _____ Date: _____

Technilight SMART

TSBW3A

3-function BT wall switch
AC 120-277 V



Description

The TSBW3A is a Bluetooth wireless wall switch with AC 120-277V power supply. It allows wireless control of Technilight Smart devices, with on/off, dimmer (DIM+) and dimmer (DIM-) functions. The TSBW3A can be used to retrofit a standard wall switch.

Features


- 120-277 VAC.
- Ideal for retrofitting existing wall controls (neutral required).
- Quickly control Technilight Smart devices with the touch of a button via Bluetooth.
- Bluetooth 5.0 network technology allows the switch to be connected to one or more lighting groups via the Technilight Smart app.

Specifications


Input voltage	AC120-277V
Frequency	50/60Hz
Input current	10mA Max
Bluetooth transmit	100’ Max
Radio frequency	2.4GHz ± 75MHz
Bluetooth version	5.0
Housing material	UL 94-5VA
Operating temperature	0°C ~ 40°C, 32°F ~ 104°F
Storage temperature	-30°C ~ 85°C, -22°F ~ 185°F
IP rating	IP20
Color	Plate: White, Housing: Black
Warranty	5 years
Compliance	UL60730, UL1376, RoHS
Safety	Listed LED Controller cULus E547544 DLC: coming soon

Information subject to change without notice. Pictures for illustration purpose only. rev. 2.5.4

Branchement

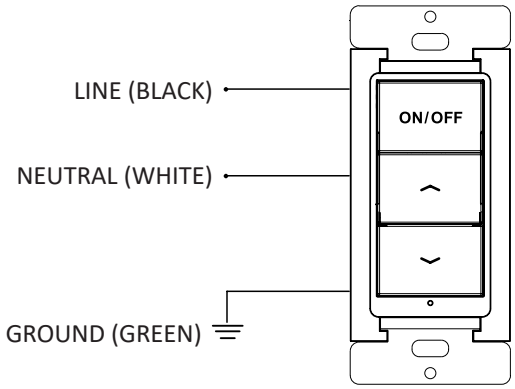

Dimensions

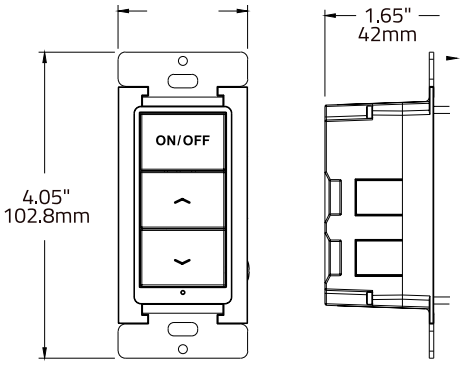

Information subject to change without notice. Pictures for illustration purpose only. rev. 2.5.4

Product label

Technilight SMART

Model: TSBW3A

3 Key AC Wireless Wall Switch

Operating Temperature: 0°C to 40°C

Use 14AWG wire rated for at least 75°C

Strip 10mm (±1) insulation, connect or disconnect for field wiring

c UL us LISTED

APPLIANCE CONTROL

4MD4

E547544

Application

Technilight Smart
Google play
Android

Technilight Smart
Apple store
iOS

Information subject to change without notice. Pictures for illustration purpose only. rev. 2.5.4